



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2013/09/07	Tom_gu	Change Rev. I To Rev.A
B	LEN1760396-398	2017-07-07	Ouyang	Update Pin Out & Update cable

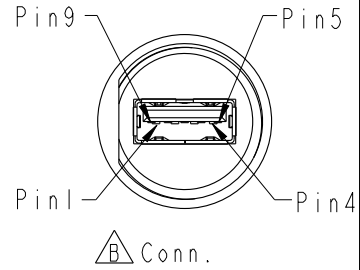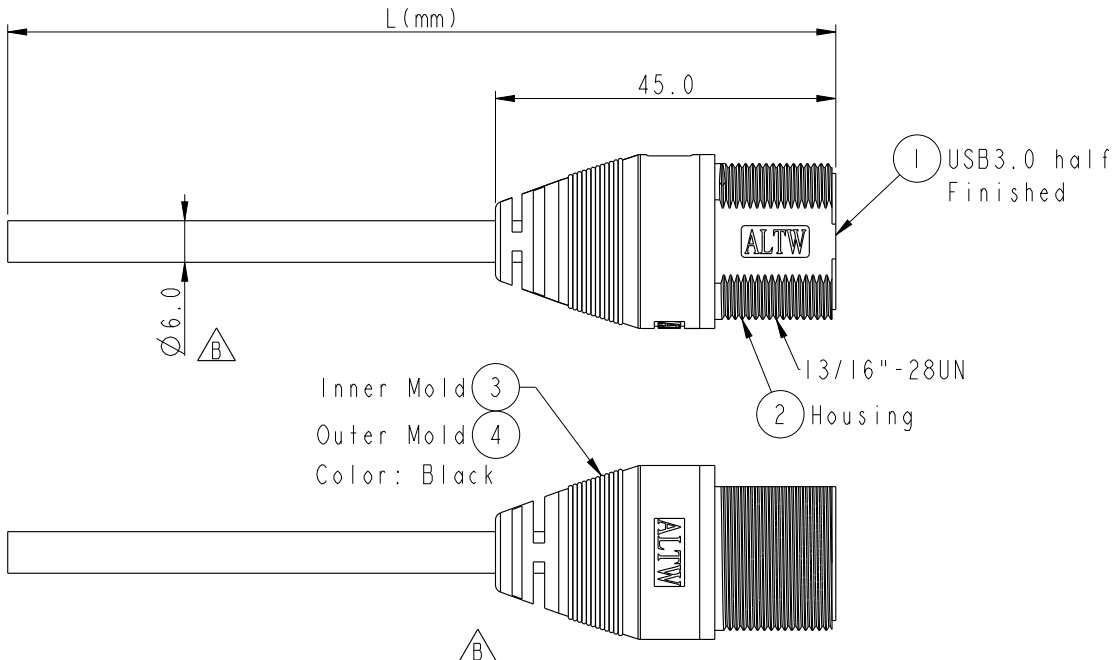

UA-30AMFM-SL7BXX
 XX : 01~03Meters
 01 : 01Meter
 03 : 03Meters
 Cable Length(L): 01~03Meters

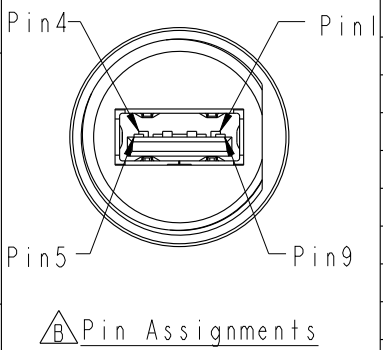

Shield	Braid	編織	Shield	
9	Orange	28AWG 橙	SDP2+	Twist
8	Purple	28AWG 紫	SDP2-	
7	Drain	28AWG	SDP2_Drain	Twist
6	Yellow	28AWG 黃	SDP1+	
5	Blue	28AWG 藍	SDP1-	Twist
7	Drain	28AWG	SDP1_Drain	
4	Black	28AWG 黑	GND_PWRrt	Twist
3	Green	28AWG 綠	UTP_D+	
2	White	28AWG 白	UTP_D-	Twist
1	Red	28AWG 紅	PWR	
Conn.	Wire Color		Signal Name	

Pin Out

Note:
 * \varnothing Important Dimension.
 * Waterproof Rate: IP67
 * Jack: USB3.0-A Female Solder
 * Housing: ABS, 94-V0, Black
 * Cable: UL2725(IPx28#+DAM)*2+1P*28#+2C*28#+ABD, PVC Jacket, UV Resistant, OD=6.0mm, Black
 * Cable Length Tolerance: 01M:±40mm, 02M~03M:±60mm
 * All of Drain twisted together.

UNIT:mm

TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE USB3.0 Female Jack to Cable End			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.5	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ouyang	DATE 2017-07-07
DWG NO UA-30AMFM-SL7BXX	CHECKED BY Feng-li	DATE 2017-07-07
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2017-07-07

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.