



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



URZ Compact & Low-Profile Sized, Wide Temperature Range

- Very small case sizes same as URS, but operating over wide temperature range of -55 (-40) to $+105^{\circ}\text{C}$.
- Compliant to the RoHS directive (2011/65/EU).



Values marked with an ※ in the dimension table are scheduled to be discontinued and are not recommended for new designs.


URZ



Specifications

Item	Performance Characteristics																																																				
Category Temperature Range	-55 to $+105^{\circ}\text{C}$ (6.3 to 100V), -40 to $+105^{\circ}\text{C}$ (160 to 400V)																																																				
Rated Voltage Range	6.3 to 400V																																																				
Rated Capacitance Range	0.1 to 10000µF																																																				
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																																																				
Leakage Current	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3 to 100</th> <th>160 to 400</th> </tr> <tr> <td>_____</td> <td>After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater. After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.</td> <td>After 1 minute's application of rated voltage at 20°C, $I = 0.04\text{CV} + 100$ (μA) or less</td> </tr> </table>	Rated voltage (V)	6.3 to 100	160 to 400	_____	After 1 minute's application of rated voltage at 20°C , leakage current is not more than 0.03CV or 4 (μA), whichever is greater. After 2 minutes' application of rated voltage at 20°C , leakage current is not more than 0.01CV or 3 (μA), whichever is greater.	After 1 minute's application of rated voltage at 20°C , $I = 0.04\text{CV} + 100$ (μA) or less																																														
	Rated voltage (V)	6.3 to 100	160 to 400																																																		
_____	After 1 minute's application of rated voltage at 20°C , leakage current is not more than 0.03CV or 4 (μA), whichever is greater. After 2 minutes' application of rated voltage at 20°C , leakage current is not more than 0.01CV or 3 (μA), whichever is greater.	After 1 minute's application of rated voltage at 20°C , $I = 0.04\text{CV} + 100$ (μA) or less																																																			
Tangent of loss angle (tan δ)	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz at 20°C																																																				
Stability at Low Temperature	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25																										
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400																																								
tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25																																									
Endurance	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> <tr> <td>Impedance ratio</td> <td colspan="12">Measurement frequency : 120Hz</td> </tr> <tr> <td>Z-25°C / Z-20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>6</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>Z-40°C / Z-20°C</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>4</td> <td>10</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400	Impedance ratio	Measurement frequency : 120Hz												Z- 25°C / Z- 20°C	5	4	3	2	2	2	2	2	2	3	3	6	ZT / Z20 (MAX.)	Z- 40°C / Z- 20°C	10	8	6	4	3	3	3	3	4	4	10
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400																																								
Impedance ratio	Measurement frequency : 120Hz																																																				
Z- 25°C / Z- 20°C	5	4	3	2	2	2	2	2	2	3	3	6																																									
ZT / Z20 (MAX.)	Z- 40°C / Z- 20°C	10	8	6	4	3	3	3	3	4	4	10																																									
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C .																																																				
	<table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 20\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 20\%$ of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																																														
Capacitance change	Within $\pm 20\%$ of the initial capacitance value																																																				
tan δ	200% or less than the initial specified value																																																				
Leakage current	Less than or equal to the initial specified value																																																				
Marking	Printed with white color letter on black sleeve.																																																				


Radial Lead Type

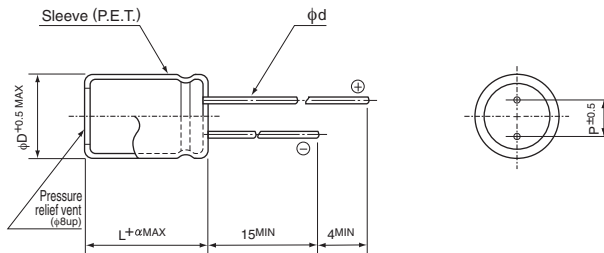

α	$(\phi D < 20)$		$(\phi D \geq 20)$					
	1.5	2.0	2.0	2.0				
ϕD	5	6.3	8	10	12.5	16	18	20
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0

● Please refer to page 20 about the end seal configuration.

Type numbering system (Example : 10V 330µF)

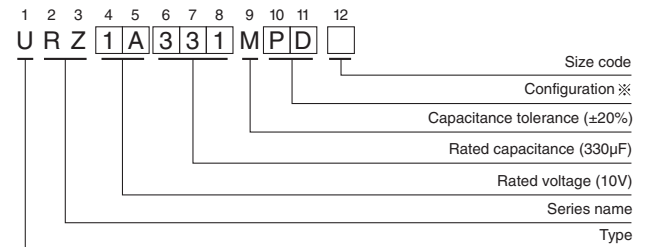

※ Configuration

ϕD	Pb-free leadwire Pb-free PET sleeve
5 - 6.3	DD
8 - 10	PD
12.5 to 18	HD
20	RD

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

URZ

■ Dimensions

V		6.3		10		16		25		35		50	
Cap.(μF)	Code	0J		1A		1C		1E		1V		1H	
0.1	0R1											※ 5 × 9	1.1
0.22	R22											※ 5 × 9	2.3
0.33	R33											※ 5 × 9	3.5
0.47	R47											※ 5 × 9	5
1	010											※ 5 × 9	12
2.2	2R2											5 × 9	18
3.3	3R3											5 × 9	25
4.7	4R7							5 × 9	20	5 × 9	25	5 × 9	30
10	100					5 × 9	30	5 × 9	35	5 × 9	40	5 × 9	46
22	220	5 × 9	25	5 × 9	40	5 × 9	50	5 × 9	55	5 × 9	60	5 × 9	65
33	330	5 × 9	40	5 × 9	55	5 × 9	60	5 × 9	70	5 × 9	75	6.3 × 9	85
47	470	5 × 9	55	5 × 9	65	5 × 9	70	5 × 9	80	6.3 × 9	95	6.3 × 9	100
100	101	5 × 9	90	5 × 9	95	6.3 × 9	115	6.3 × 9	130	8 × 9	155	10 × 9	170
220	221	6.3 × 9	145	6.3 × 9	155	8 × 9	205	10 × 9	220	10 × 9	235	10 × 12.5	290
330	331	6.3 × 9	180	8 × 9	210	10 × 9	240	10 × 9	270	10 × 12.5	340	12.5 × 12.5	370
470	471	8 × 9	235	8 × 9	275	10 × 9	290	10 × 12.5	370	12.5 × 12.5	420	16 × 15	540
1000	102	10 × 9	370	10 × 12.5	450	12.5 × 12.5	520	12.5 × 15	590	16 × 15	720	18 × 20	830
2200	222	12.5 × 15	635	12.5 × 15	690	16 × 15	830	18 × 15	970	18 × 20	1110	20 × 25	1250
3300	332	16 × 15	860	16 × 15	940	18 × 15	1050	18 × 20	1220	20 × 25	1430		
4700	472	16 × 15	1010	18 × 15	1120	18 × 20	1260	18 × 25	1470				
6800	682	18 × 15	1200	18 × 20	1330	18 × 25	1560					Case size	Rated ripple
10000	103	18 × 20	1450	18 × 25	1700							φ D × L (mm)	

V		63		100		160		200		250		400	
Cap.(μF)	Code	1J		2A		2C		2D		2E		2G	
0.1	0R1			※ 5 × 9	1.2								
0.22	R22			※ 5 × 9	3								
0.33	R33			※ 5 × 9	4.5								
0.47	R47			※ 5 × 9	6.5								
1	010			5 × 9	12								
2.2	2R2			5 × 9	17								
3.3	3R3			5 × 9	25								
4.7	4R7			6.3 × 9	32								
10	100	5 × 9	42	6.3 × 9	50							16 × 15	100
22	220	6.3 × 9	71	8 × 9	93					16 × 15	200	● 18 × 15	200
33	330	8 × 9	100	10 × 9	130			16 × 15	250	● 18 × 15	250	18 × 20	250
47	470	8 × 9	120	10 × 12.5	165	16 × 15	300	● 18 × 15	300	△ 18 × 20	300	★ 18 × 25	300
68	680					● 18 × 15	350	△ 18 × 20	350	18 × 20	350	20 × 25	350
100	101	10 × 9	215	12.5 × 15	265	△ 18 × 20	420	★ 18 × 25	420	18 × 25	420		
150	151					★ 18 × 25	510	18 × 25	510				
220	221	12.5 × 12.5	335	16 × 15	440	20 × 25	550						
330	331	12.5 × 15	510	18 × 15	540							Case size	Rated ripple
470	471	16 × 15	640									φ D × L (mm)	

Rated ripple current (mArms) at 105°C 120Hz

Size φ 16 × 20 is available for capacitors marked "●"
 Size φ 20 × 15 is available for capacitors marked "△"
 Size φ 20 × 20 is available for capacitors marked "★"

In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

V	Cap.(μF)	Frequency				
		50Hz	120Hz	300Hz	1 kHz	10kHz or more
6.3 to 100	0.1 to 47	0.75	1.00	1.35	1.57	2.00
	100 to 470	0.80	1.00	1.23	1.34	1.50
	1000 to 10000	0.85	1.00	1.10	1.13	1.15
160 to 400	10 to 220	0.80	1.00	1.25	1.40	1.60