



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VCO-109/109TC

Nominal Operating Parameters

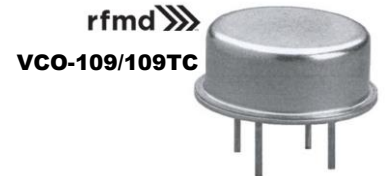

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
General Performance					
Frequency Range	900		1800	MHz	100% Production Tested
Tuning Voltage :					
900MHz	0	1.2		Vdc	100% Production Tested
1800MHz		18.5	20	Vdc	100% Production Tested
Tuning Sensitivity:					
900MHz	61.2	81.6	102	MHz/V	100% Production Tested
1125MHz	44.3	59.1	73.9	MHz/V	100% Production Tested
1350MHz	49.1	65.5	81.9	MHz/V	100% Production Tested
1575MHz	41.8	55.6	69.6	MHz/V	100% Production Tested
1800MHz	17.6	23.5	29.4	MHz/V	100% Production Tested
Output Power	10	12.5	16	dBm	100% Production Tested
Output Phase Noise:					
10kHz		-90	-84	dBc/Hz	100% Production Tested
100kHz		-112	-106	dBc/Hz	100% Production Tested
1000kHz		-135	-129	dBc/Hz	100% Production Tested
Power Supply	14.75	15	15.25	V	100% Production Tested
Supply Current		15	18	mA	100% Production Tested
Harmonic Suppression:					
2nd Harmonic		-15	-10	dBc	100% Production Tested
3rd Harmonic		-15	-10	dBc	100% Production Tested
Spurious (Non-Harmonic)			-80	dBc	
Frequency Pushing – 14.75V to 15.25V		4	6	MHz p-p	
Frequency Pulling – 20 dBRL		20	25	MHz p-p	
Output Impedance		50		Ω	
Modulation:					
Bandwidth	15000	20000		kHz	
Input Impedance		0.05		kΩ	

Package: TO-8 (Cir), 0.504 x 0.504 x 0.27 inches

VCO-109 Temperature Range: 0°C to 70°C

VCO-109TC Temperature Range: -55°C to 100°C

RF Micro Devices Inc. 7628 Thorndike Road, Greensboro, NC 27409-9421
 For sales or technical support, contact RFMD at +1.336.678.5570 or customerservice@rfmd.com.

DS140311

RF MICRO DEVICES® and RFMD® are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks, and registered trademarks are the property of their respective owners. ©2013, RF Micro Devices, Inc.