



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



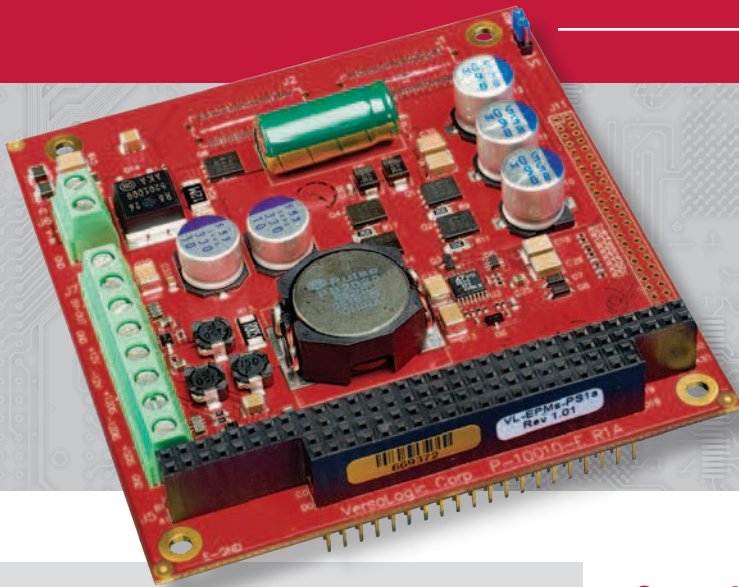

- 50 watt DC/DC converter
- Input range: +9 to +40 VDC
- Output: +5V and ±12V
- Reverse polarity and transient protection
- SUMIT and PC/104™ expansion

## Highlights

### SUMIT and PC/104 Compatible

Supports SUMIT and ISA expansion on a compact, highly rugged format.

### Triple Output Supply with Wide Input Voltage

Output voltages of +5V and ±12V generated from +9 to +40 VDC input.

### Input Protection

Diode protected against input polarity reversal. Transient voltage suppression provides enhanced ESD protection.

### Efficient Switching Design

Engineered for maximum power efficiency and optimum thermal management.

### Power Connectors

Up to 50 watts outputs delivered to the SUMIT and ISA bus power pins as well as card edge terminal blocks.

### TTL Level Disable Inputs

Enables unused power supplies to be disabled to save power or can be used for on/off power switching.

### MIL-STD-202G

Qualified for high shock/vibration environments.

## Overview

The VL-EPMs-PS1 is a plug-in 50 watt switching DC/DC converter and power supply module designed to power an embedded system stack. This robust power supply is the ideal solution for powering systems in defense, aerospace, medical device, robotics, and factory automation where a small footprint and dependable operation are crucial design factors.


This in-stack supply is an ideal way to provide clean, reliable, noise-free power to the heart of larger systems. It eliminates the problems associated with distributing clean, properly regulated power within automated systems, especially those that include motors and other sources of electrical noise. Voltage sag, intermittent operation, and unexplained system resets are eliminated by having a dedicated in-stack power source for the control system.

Like all VersaLogic products, the VL-EPMs-PS1 is designed to support OEM applications where high reliability and long-term availability are required. From application design-in to 5+ guaranteed years of production life, the VL-EPMs-PS1 provides a durable embedded computer solution with an excellent cost of ownership. The VL-EPMs-PS1 is manufactured and tested to the highest quality standards and is fully RoHS compliant. Customization is available, even in low OEM quantities.


## Details

The VL-EPMs-PS1 power supply provides up to 50 watts of continuous output power. The unit operates over a wide +9 to +40 VDC input range to produce standard output voltages of +5V and ±12V. Output power is delivered through the stackable SUMIT and/or ISA connectors to power compatible boards while auxiliary terminal blocks provide output power for sensors, transducers, and other ancillary circuitry.

The module is designed to operate over an extended temperature range (50W from -40° to +60°C; 25W at +85°C) and is certified to MIL-STD-202G specifications for shock and vibration. Input protection clamps voltages to safe levels while a 10 amp fuse protects the card from overcurrent conditions. Regulation and transient suppression reduce supply ripple and protect the computer circuitry from power source hazards. Input protection guards against input polarity reversal of up to +40 VDC.



VL-EPMs-PS1a (Top)



VL-EPMs-PS1a (Bottom)

### Ordering Information

VL-EPMs-PS1a .....50W, SUMIT-AB + ISA connectors

### Accessories

VL-HDW-105 ..... SUMIT standoff package - metric thread

VL-HDW-106 ..... SUMIT standoff package - English thread


VL-HDW-203 .....PC/104 extractor tool, metal

SUMIT Resources		
Form Factor: SUMIT-104		
	SUMIT-A	SUMIT-B
PCIe x1	-	-
PCIe x4	-	-
USB	-	-
ExpressCard	-	-
LPC	-	-
SPI/μWire	-	-
SMBus/I <sup>2</sup> C	-	-
+12V	✓	-
+5V	✓	✓
+5Vsb	-	-
+3.3V	-	-

### SPECIFICATIONS

<b>General</b>	Board Size	PC/104 standard: 90 mm x 96 mm (3.55" x 3.78")
	Switching Frequency	+5V output: 200 KHz fixed ±12V output: 1.2 MHz fixed
	Expansion	SUMIT, PC/104 (ISA)
	RoHS	Compliant
<b>Environmental</b>	Operating Temperature	-40° to +60°C at 50W; -40° to +85°C at 25W*
	Storage Temperature	-40° to +85°C
	Thermal Shock	5°C/min. over operating temperature
	Humidity	Less than 95%, noncondensing
	Vibration, Sinusoidal Sweep	MIL-STD-202G, Method 204, Modified Condition A: 2g constant acceleration from 5 to 500 Hz, 20 minutes per axis
	Vibration, Random	MIL-STD-202G, Method 214A, Condition A: 0.02g <sup>2</sup> /Hz (5.35g rms), 15 minutes per axis
<b>Input</b>	Mechanical Shock	MIL-STD-202G, Method 213B, Condition J: 30g half-sine, 11 ms duration per axis
	Power Requirements	+9 to +40 VDC, 75W
<b>Output</b>	Protection	Transient voltage, voltage reversal, and overcurrent
	+5V	50W (10A) max. continuous output from -40° to +60°C; 25W (5A) at +85°C*
	±12V	1.8W (150 mA) each max. continuous output from -40° to +85°C
	Voltage Ripple	+5V output: 30 mV peak-to-peak at 50% load ±12V output: 30 mV peak-to-peak at 50% load
	Regulation	Less than 1%
	Protection	Transient voltage and overcurrent

### \* POWER OUTPUT VS. TEMPERATURE

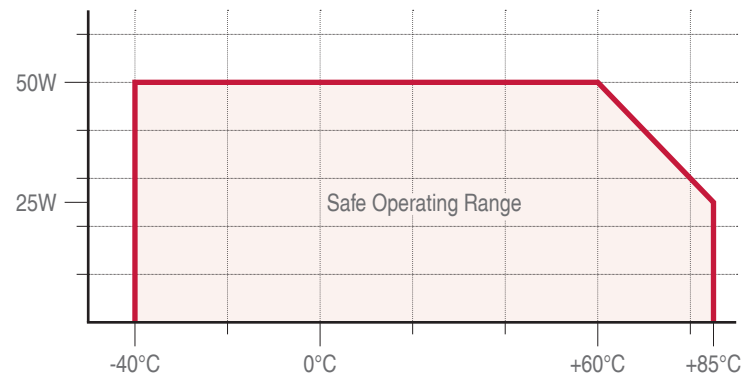

Data represents standard operation at +25°C with +5V supply unless otherwise noted. Specifications are subject to change without notification. PC/104 is a trademark of the PC/104 Consortium. SUMIT is a trademark of the SFF-SIG.