



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VSC7145

VITESSE

VSC7145 - Dual Speed 10-bit Serializer/Deserializer



FEATURES:

- ▶ Dual Speed Operation:
 - Fibre Channel: 1.06/2.12Gb/s
 - Gigabit Ethernet: 1.25Gb/s
 - InfiniBand™: 2.5Gb/s
- ▶ 10-bit, SSTL_2 or SSTL_3 Interface
- ▶ HSPI Interface Compliant
- ▶ ASIC-Friendly™ Timing to the Transmitter
- ▶ Separate Transmitter/Receiver Rate Controls support Auto Speed Negotiation
- ▶ No Passives needed on High Speed Signals
- ▶ On-chip, 100 Ohm Termination
- ▶ Write Pre-Emphasis in Transmitter
- ▶ Cable Equalization in Receiver
- ▶ Analog/Digital Signal Detection
- ▶ Flexible Reference Clock
- ▶ Single 3.3V Supply, 800mW
- ▶ 64-pin, 14 mm PQFP Package
- ▶ Pin Compatible to Agilent HDMP-263x

SPECIFICATIONS:

- ▶ Data Rate: 1.0 - 2.5 Gb/s
- ▶ REFCLK: 52.5 to 126 MHz
- ▶ Frequency Offset: +/-200 ppm
- ▶ Fast Locking: <300 data edges
- ▶ Transmitter Output: 1.0V p-p Minimum
- ▶ Receiver Input: 200mV p-p Minimum
- ▶ 3.3V +/- 5% Supply
- ▶ 0° - 70°C Ambient Operation

APPLICATIONS:

- ▶ Fibre Channel
 - Host Adapters
 - Hubs/Switches
 - RAID systems
- ▶ Gigabit Ethernet
 - NICs
 - Switches
 - Proprietary Uplinks
- ▶ InfiniBand
 - Host Channel Adapters
 - Target Channel Adapters
 - Switches
- ▶ Proprietary Serial Links

PRODUCT OPTIONS:

Part Number	Low Speed I/O	Speed (Gb/s)	HS Termination	Compatibility
VSC7145RU-30	SSTL_2	1.05 - 1.26	100 Ohms	Agilent HDMP-2630
VSC7145RU-31	SSTL_3	(Half Speed)		Agilent HDMP-2631
VSC7145RU-34	SSTL_2	or 2.10 - 2.52 (Full Speed)		Agilent HDMP-2634

VSC7145 - Dual Speed 10-bit Serializer/Deserializer


GENERAL DESCRIPTION:




The VSC7145 is a dual-speed Fibre Channel, Gigabit Ethernet and InfiniBand Serializer/Deserializer (SerDes) optimized for performance and power in an industry-standard pinout. It accepts 10-bits of SSTL, 8B/10B encoded transmit data, latches it synchronously to the Transmit Byte Clock (TBC) and serializes it onto the SO differential output at a baud rate which is 10, 20 or 40 times the REFCLK frequency. The VSC7145 samples serial receive data on the SI input, recovers the clock and data, deserializes it onto a 10-bit SSTL bus and outputs two recovered clocks at 1/10th or 1/20th of the baud rate. Both disparities of the K28.5 characters are

detected and used for aligning the serial data to the parallel output bus. Independent speed selectors control the transmitter and receiver separately to support industry-standard automatic speed negotiation protocols. A combined analog/digital signal detect circuit indicates the presence of valid signal levels on the SI input. The VSC7145 contains on-chip PLL circuitry for synthesis of the bit rate transmit clock, and extraction of the clock from the received serial stream. The parallel bus of the VSC7145 is compliant with the High Speed Parallel Interface (HSPI) standard developed by the T11.2 Fibre Channel Committee.

VSC7145 BLOCK DIAGRAM:

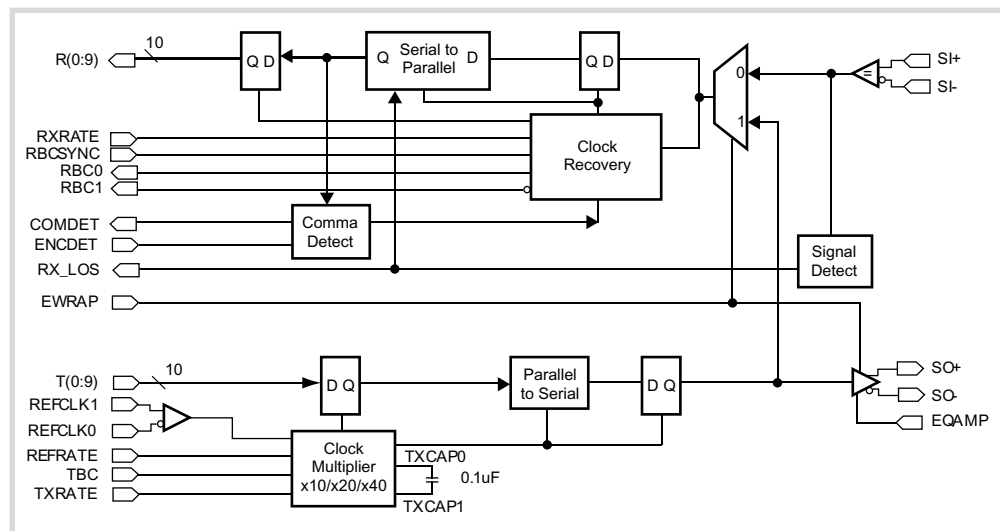

DUAL SPEED AUTO NEGOTIATION FIBRE CHANNEL APPLICATION:

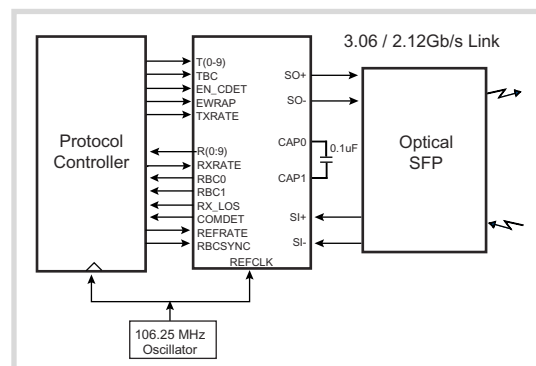

Your Partner for Success.

For more information on Vitesse Products visit the Vitesse web site at www.vitesse.com or contact Vitesse Sales at (800) VITESSE or sales@vitesse.com

VITESSE

741 Calle Plano
Camarillo, CA 93012
Tel: 805.388.3700
Fax: 805.388.7565
www.vitesse.com