



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



VW Type

5.0 x 3.2mm SMD Voltage Controlled Crystal Oscillator



FEATURE

- Typical 5.0 x 3.2 x 1.25 mm 6 pads ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Operating temperature up to 105°C
- Tri-state enable/disable

TYPICAL APPLICATION


- Set-top Box, HDTV
- WiMAX/WLAN
- xDSL/ VoIP, Cable modem

DIMENSION (mm)

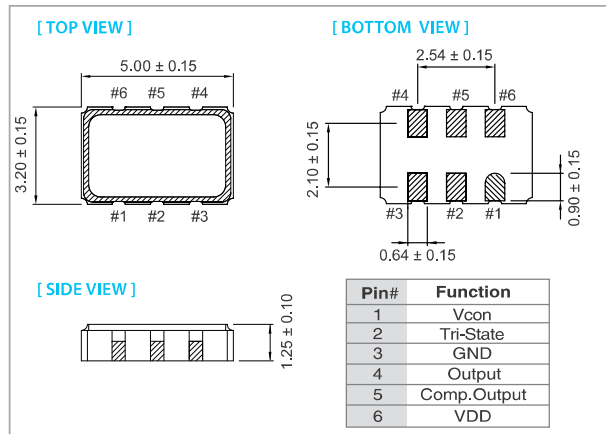

RoHS Compliant

SOLDER PAD LAYOUT (mm)

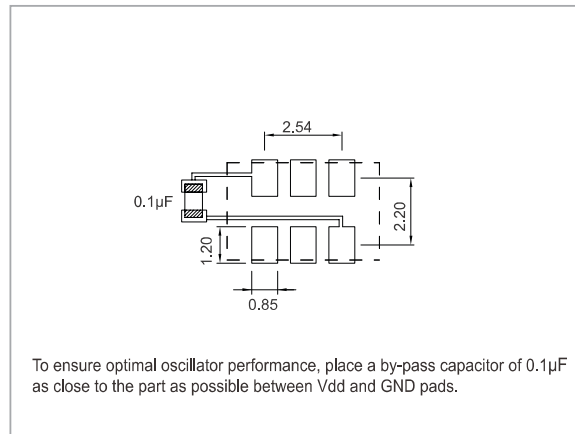

ELECTRICAL SPECIFICATION

Parameter	3.3V		Unit
	Min	Max.	
Supply Voltage Variation (VDD)	VDD-5%	VDD+5%	V
Frequency Range	1.5	170	MHz
Standard Frequency	19.44, 38.4		
Absolute Pulling Range (APR)	±50	-	ppm
Control Voltage Range	0.3	3.0	V
Supply Current	1.5 MHz ≤ Fo < 20 MHz	-	10
	20 MHz ≤ Fo < 50 MHz	-	20
	50 MHz ≤ Fo ≤ 170 MHz	-	30
Output Level	Output High (Logic"1")	2.97	-
	Output Low (Logic"0")	-	0.33
Transition Time: Rise/Fall Time+	1.5 MHz ≤ Fo < 20 MHz	-	5
	20 MHz ≤ Fo < 50 MHz	-	4
	50 MHz ≤ Fo ≤ 170 MHz	-	3
Start Time	-	-	2
Tri-State (input to Pin 2)	Enable (High voltage or floating)	2.31	-
	Disable (Low voltage or GND)	-	0.99
Linearity	-	-	10
Modulation Bandwidth (BW)	1.5 MHz ≤ Fo ≤ 170 MHz	15	-
Input Impedance	-	10000	-
Period Jitter (Pk-Pk)	-	-	40
RMS Phase Jitter (Integrated 12 kHz ~ 20 MHz)	-	-	1
Phase Noise@38.4 MHz	100 Hz	-100	-
	1 kHz	-133	-
	10 kHz	-140	-
Aging (@ 25°C 1st year)	-	-	±3
Storage Temp. Range	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

+ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	
	±25	±50
-10 ~ +60	○	○
-20 ~ +70	○	○
-40 ~ +85	×	○
-40 ~ +105	×	○

* ○: Available △: Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration

Note: not all combination of options are available. Other specifications may be available upon request.

Rev(10)04/2017

www.tai tien.com

sales@tai tien.com.tw