



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**LOW-JITTER SAW OSCILLATOR (SPSO)**  
**OUTPUT : LV-PECL, LVDS**

**XG-2121 / 2102CA**

- Frequency range : 100 MHz to 700 MHz
- Supply voltage : 2.5 V ... XG-2121CA  
3.3 V ... XG-2102CA
- Output : LV-PECL or LVDS
- Function : Output enable (OE)
- External dimensions : 7.0 × 5.0 × 1.2 mm
- Low jitter and low phase noise by SAW unit.



**Product Number (please contact us)**  
 XG-2121CA P: X1M000311xxxx00  
 XG-2121CA L: X1M000351xxxx00  
 XG-2102CA P: X1M000301xxxx00  
 XG-2102CA L: X1M000341xxxx00



Actual size



**Specifications (characteristics)**

| Item                                 | Symbol                          | LV-PECL   |               | LVDS                               |  | Conditions / Remarks   |                                       |
|--------------------------------------|---------------------------------|---|---------------|------------------------------------|--|--|---------------------------------------|
|                                      |                                 | XG-2121CA P   | XG-2102CA P   | XG-2121CA L                        | XG-2102CA L  |  |                                       |
| Output frequency range               | f <sub>o</sub>                  | 100 MHz to 700 MHz                                      |               |                                    |  | Please contact us about available frequencies.   |                                       |
| Supply voltage                       | V <sub>cc</sub>                 | 2.5 V ±0.125 V  | 3.3 V ±0.33 V | 2.5 V ±0.125 V                     | 3.3 V ±0.33 V  |  |                                       |
| Storage temperature                  | T <sub>stg</sub>                | -55 °C to +125 °C                                       |               |                                    |  | Storage as single product.   |                                       |
| Operating temperature                | T <sub>use</sub>                | P:0 °C to +70 °C ,R:-5 °C to +85 °C ,S:-20 °C to +70 °C |               |                                    |  |  |                                       |
| Frequency tolerance                  | f <sub>tol</sub>                | G: ±50 × 10 <sup>-6</sup> , H: ±100 × 10 <sup>-6</sup>  |               |                                    |  |  |                                       |
| Current consumption                  | I <sub>cc</sub>                 | 60 mA Max.  |               | 30 mA Max.                         |  | OE=V <sub>cc</sub> , L <sub>ECL</sub> =50 Ω or L <sub>LVDS</sub> =100 Ω  |                                       |
| Disable current                      | I <sub>dis</sub>                | 2 mA Max.   |               | 15 mA Max.                         |  | OE=GND   |                                       |
| Symmetry                             | SYM                             | 45 % to 55 %  |               |                                    |  | At outputs crossing point  |                                       |
| Output voltage (LV-PECL)             | V <sub>OH</sub>                 | 1.55 V Typ.   | 2.35 V Typ.   | -                                  |  | DC characteristics   |                                       |
|                                      |                                 | V <sub>cc</sub> -1.025 V to V <sub>cc</sub> -0.88 V     |               | -                                  |  |  |                                       |
|                                      | V <sub>OL</sub>                 | 0.80 V Typ.   | 1.60 V Typ.   | -                                  |  |  |                                       |
|                                      |                                 | V <sub>cc</sub> -1.81 V to V <sub>cc</sub> -1.62 V      |               | -                                  |  |  |                                       |
| Output voltage (LVDS)                | V <sub>OD</sub>                 | -   |               | 350 mV Typ., 247 mV to 454 mV      | V <sub>OD1</sub> , V <sub>OD2</sub>                    | DC characteristics   |                                       |
|                                      | dV <sub>OD</sub>                | -   |               | 50 mV Max.                         | dV <sub>OD</sub> =  V <sub>OD1</sub> -V <sub>OD2</sub> |  |                                       |
|                                      | V <sub>OS</sub>                 | -   |               | 1.25 V Typ., 1.125 V to 1.375 V    | V <sub>OS1</sub> , V <sub>OS2</sub>                    |  |                                       |
|                                      | dV <sub>OS</sub>                | -   |               | 150 mV Max.                        | dV <sub>OS</sub> =  V <sub>OS1</sub> -V <sub>OS2</sub> |  |                                       |
| Output load condition (ECL) / (LVDS) | L <sub>ECL</sub>                | 50 Ω  |               | -                                  |  | Terminated to V <sub>cc</sub> -2.0 V   |                                       |
|                                      | L <sub>LVDS</sub>               | -   |               | 100 Ω                              |  | Connected between OUT to OUT   |                                       |
| Input voltage                        | V <sub>IH</sub>                 | 70 % V <sub>cc</sub> Min.                               |               |                                    |  | OE terminal  |                                       |
|                                      | V <sub>IL</sub>                 | 30 % V <sub>cc</sub> Max.                               |               |                                    |  |  |                                       |
| Rise time / Fall time                | t <sub>r</sub> / t <sub>f</sub> | 400 ps Max.   |               |                                    |  | Between 20 % and 80 % of (V <sub>OH</sub> -V <sub>OL</sub> ).<br>Between 20 % and 80 % of Differential Output Peak to Peak voltage |                                       |
| Start-up time                        | t <sub>str</sub>                | 10 ms Max.  |               |                                    |  | Time at minimum supply voltage to be 0 s   |                                       |
| Phase Jitter                         | tpj                             | 0.23 ps Max.  |               | 0.27 ps Max.                       |  | 100 MHz ≤ f <sub>o</sub> < 150 MHz   | Offset frequency:<br>12 kHz to 20 MHz |
|                                      |                                 | 0.22 ps Max.  |               | 0.24 ps Max.                       |  | 150 MHz ≤ f <sub>o</sub> < 200 MHz   |                                       |
|                                      |                                 | 0.21 ps Max.  |               | 0.23 ps Max.                       |  | 200 MHz ≤ f <sub>o</sub> < 300 MHz   |                                       |
|                                      |                                 | 0.18 ps Max.  |               | 0.19 ps Max.                       |  | 300 MHz ≤ f <sub>o</sub> < 400 MHz   |                                       |
|                                      |                                 | 0.16 ps Max.  |               | 0.16 ps Max.                       |  | 400 MHz ≤ f <sub>o</sub> < 500 MHz   |                                       |
|                                      |                                 | 0.14 ps Max.  |               | 0.14 ps Max.                       |  | 500 MHz ≤ f <sub>o</sub> < 600 MHz   |                                       |
| 0.10 ps Max.                         |                                 | 0.10 ps Max.  |               | 600 MHz ≤ f <sub>o</sub> ≤ 700 MHz |  |  |                                       |
| Frequency aging                      | f <sub>aging</sub>              | ± 10 × 10 <sup>-6</sup> / year Max.                     |               |                                    |  | +25 °C, First year, V <sub>cc</sub> =2.5 V,3.3 V   |                                       |

Product Name **XG-2121 CA 212.500000MHz P H P A** (ⓐⓑⓒⓓⓔⓕⓖⓗ: GRA, GSA are not available)

(Standard form)

ⓐⓑⓒⓓⓔⓕⓖⓗ

ⓐModel ⓑPackage type ⓒFrequency

ⓓOutput (P:LV-PECL, L:LVDS)

ⓔFrequency tolerance ⓕOperating temperature

ⓖFrequency aging (A\*1: Frequency tolerance include aging, N\*2: Frequency tolerance exclude aging)

ⓕFrequency tolerance

G ±50 × 10<sup>-6</sup>

H ±100 × 10<sup>-6</sup>

ⓕOperating temp.

P 0 to +70°C

R -5 to +85°C


S -20 to +70°C

\*1 This includes initial frequency tolerance, temperature variation, supply voltage variation, reflow drift, and aging(+25 °C,10 years).

\*2 This includes initial frequency tolerance, temperature variation, supply voltage variation, and reflow drift (except aging).


**External dimensions**

(Unit:mm)

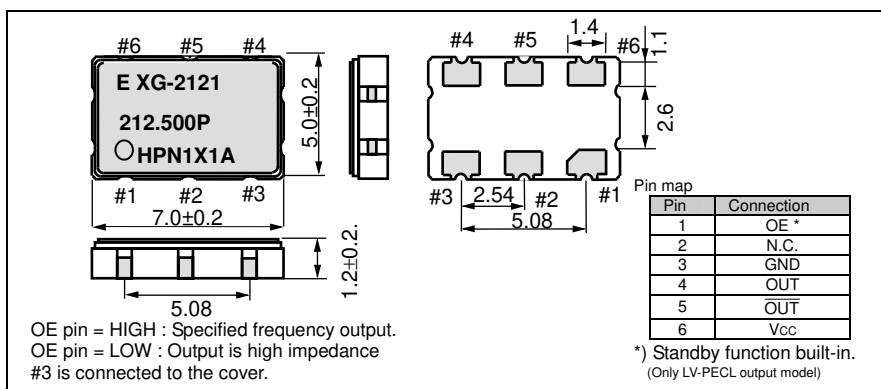

**Footprint (Recommended)**

(Unit:mm)

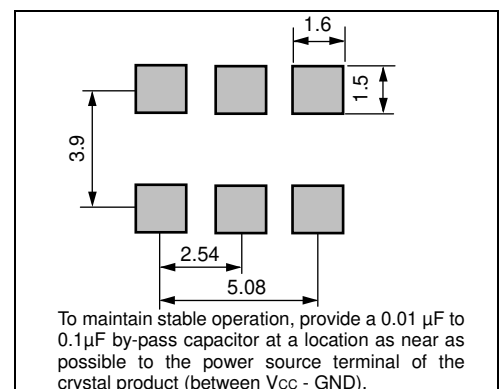

## PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.





## WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs,

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

### ► Explanation of the mark that are using it for the catalog

|   |   |
|---|---|
|  | ► Pb free.  |
|  | ► Complies with EU RoHS directive.<br>*About the products without the Pb-free mark.<br>Contains Pb in products exempted by EU RoHS directive.<br>(Contains Pb in sealing glass, high melting temperature type solder or other.) |
|  | ► Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.  |
|  | ► Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc.)   |

## Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson does not assume any liability for the occurrence of infringing on any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.  
/ Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.